

## ADVANTAGE ORACLE

LASER FUME EXTRACTION SYSTEMS

The complete, global solution for high performance laser fume extraction.

Introducing Bofa's most technically advanced Laser Fume Extractor. The AD Oracle packs a powerful range of unique features into one compact unit.

The revolutionary Auto-Voltage Sensing Pump automatically self adjusts to run on any voltage worldwide, whilst the Reverse Flow filter technology enhances filter performance and ensures longer filter life.

Closed Loop, Automatic Flow Control allows the user to preset correct flow rates, for lower noise levels and further protection of both the combined filter and the 2 stage F8 pre filter, which has a massive 12m<sup>2</sup> of surface area.

The below features all come as standard:

- Auto sensing voltage (90-257v) for global use
- Closed Loop Automatic Flow Control
- 2 Stage F8 Pre Filter with 12m<sup>2</sup> of surface area
- Reverse Flow
- 'Easi-Seal' Filter Location
- Small Footprint and Low Noise levels



FILTERS  
INSIDE  
UNIT



CLOSED LOOP  
AUTOMATIC  
FLOW CONTROL

### PART NUMBERS

Model - Stainless Steel (SS) or Powder Coated (PC) options		24V Stop / Start	Filter change / System failure signal	VOC Monitoring	Hose Kit*
AD ORACLE-SS	L1954A	A2001	A2002	A2003	A1020008 75-50mm
AD ORACLE-PC	L1944A	A2001	A2002	A2003	A1020008 75-50mm

\* Other Hose Kits are available. All of the above units are fitted with our standard filter combinations. For specific applications please call us for details.

### REPLACEMENT FILTERS AND ACCESSORIES\*

Model	Pre Filter	Combined filter
AD ORACLE	A1030156	A1030155

\* Other Filters are available. Please call us for details.

## TECHNICAL DATA

Model	AD ORACLE	
	EC	US
Dimensions (h x w x d)	980 x 430 x 430 mm	38.5 x 17 x 17"
Cabinet Construction	Brushed stainless steel/ Powder coated mild steel	Brushed stainless steel/ Powder coated mild steel
Blower	1.1kw 380m <sup>3</sup> /hr	1.1kw 223cfm
Electronics	100-240v 1ph 50/60Hz Full load current: 12.5 amps	100-240v 1ph 50/60Hz Full load current: 12.5 amps

## FILTER SPECIFICATIONS

### PRE FILTER


Surface Media Area	12m <sup>2</sup> approx
Filter Media	Glass Fibre
Filter Media Construction	Maxi Pleat
Housing	Zintec mild steel
Filter Efficiency	F8 (95% @ 0.8 microns)

## FILTER SPECIFICATIONS


### COMBINED FILTER

HEPA Filter Media	Glass Fibre
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers
Filter Efficiency	H13 (99.997% @ 0.3 microns)
Treated Activated Carbon	15kgs
Filter Housing	Zintec Mild Steel

## PRE FILTER

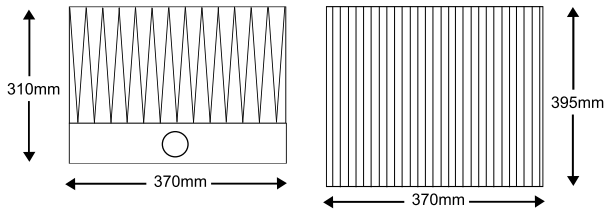


## COMBINED FILTER

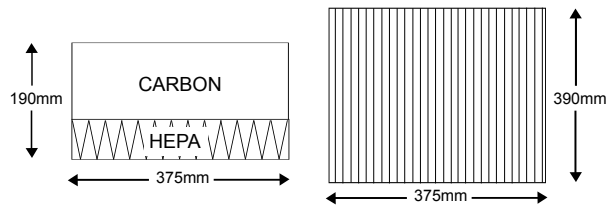


\* Other Filters are available. Please call us for details.

## AIRFLOW THROUGH FILTERS

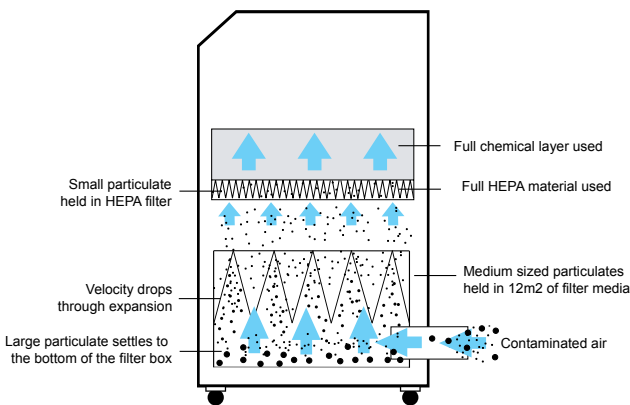

## TECHNICAL SPECIFICATION

- 1 Unit/Filter Condition Display - Automatic Closed Loop Flow Control
- 2 On/Off Switch
- 3 Signal/ Interface Cable to Laser
- 4 Power Cable
- 5 Filter Housing Cam Latch
- 6 Door Hinge
- 7 Hose Inlet Connection
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet

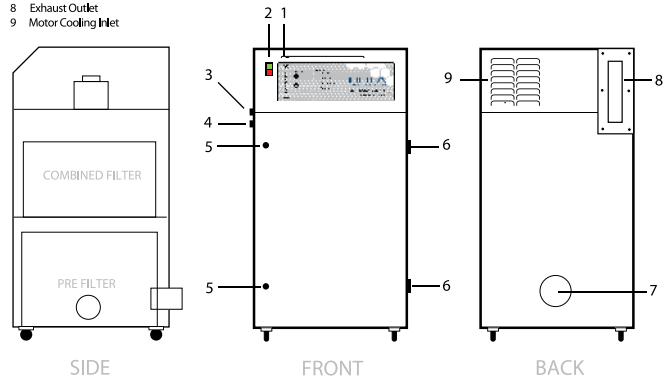

### HEAD OFFICE

21-22 BALENA CLOSE  
CREEKMOOR  
INDUSTRIAL ESTATE  
POOLE, DORSET, UK  
BH17 7DX

T. +44 (0) 1202 699 444  
F. +44 (0) 1202 699 446  
E. SALES@BOFA.CO.UK  
W. WWW.BOFA.CO.UK



### USA OFFICE

BOFA AMERICAS  
1395 SOUTH HACKMAN STREET  
STAUNTON,  
ILLINOIS, USA  
62088

T. (618)-635-4465  
F. (618)-635-2695  
E. SALES@BOFAAMERICAS.COM  
W. WWW.BOFAAMERICAS.COM

# ADVANTAGE ORACLE



AUTHORISED AGENT